

ALPS TOOL

OIL TYPE BAR FEEDER

ASR X-20Z II



ASR X-20Z II, which has been improved on the former bar feeder ASR X-16Z, has the gull wing type upper covers as standard. 10% of the floor space will be saved.

Easier treating and more stable bar feeding will be supplied.

This is the most feasible and the newest oil magazine bar feeder for all small and medium CNC automatic lathes.

ASR X-20Z II

FEATURES

- With an upper cover of gull wing type, this machine enables the supply of bars from the front or the rear.
- The newest touch operation panel makes the setup-works and the maintenance easier.
- Enable the new type synchronized device(OP)that is more durable.
- Besides the shortened mechanism, 10% of the floor space is saved, and the rack capacity of materials shows 10% increase.

ALPS TOOL

OIL TYPE BAR FEEDER

ASR X-20Z II



Operation Panel

SPECIFICATIONS


Bar Diameter	type12 $\Phi 2.0 \sim \Phi 12.0\text{mm}$ type16 $\Phi 4.0 \sim \Phi 16.0\text{mm}$ type20 $\Phi 4.0 \sim \Phi 20.0\text{mm}$
Rack Capacity	$\Phi 4 \rightarrow 48\text{pcs}$ · $\Phi 16 \rightarrow 12\text{pcs}$
Bar Length	2.5m 3.0m 4.0m
Remnant	Remnant Retract (Length 55~400mm)
Feed Speed	Forward 800mm/sec Backward 1600mm/sec
Power Source	AC200/220V · 3PH 50/60Hz · 1.5KVA
Air Supply	0.5~0.7Mpa(5~7kgf/cm ²)
Oil used	ISOVG32 20L
Weight	2.5m→360Kg 3.0m→400Kg 4.0m→480Kg
Material bend	The thing more than Class B article (0.5 mm/m) of a MAS standard



Upper Cover of gull wing type

※Specification may be changed without notice improvement.

DIMENSIONAL FIGURE

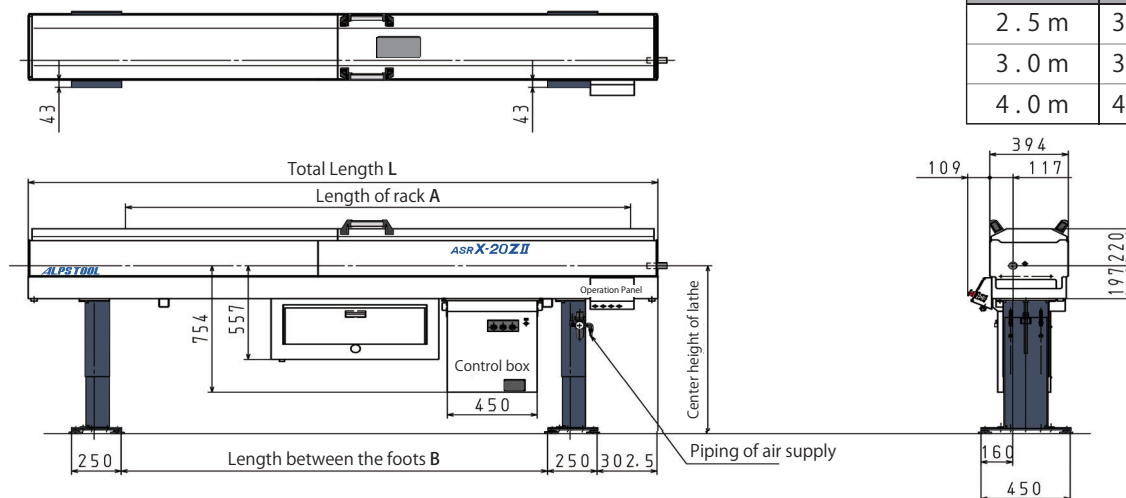

CARE FOR OPERATION

- 1) Small diameter specification is optional. Select by the processing conditions and CNC to install.
- 2) Spindle Synchro device is optional. Select as with the above.
- 3) When the bar diameter is larger than max, ID of finger chuck, give the step-cut machining to the rear end of the bar.
- 4) Parts for set-up change, options, and other special specifications are handled separately.

ALPS TOOL

ALPS TOOL CO.,LTD.

HQ, Factory 1 10070 Sakaki, Sakaki-machi, Hanishina-gun, Nagano-ken, 389-0601 Japan
Factory 2 10030 Sakaki, Sakaki-machi, Hanishina-gun, Nagano-ken, 389-0601 Japan
Factory 3 102-8 Nakanojo, Sakaki-machi, Hanishina-gun, Nagano-ken, 389-0602 Japan

阿尔卑斯工具(大连)有限公司 辽宁省大连经济技术开发区湾里街道悦祥街7号

ALPS TOOL(Dalian)CO.,LTD.

Dalian Factory No. 7 Yuexiang Street, Wanli Sub-district, Dalian Economic and Technical Development Zone, Dalian Liaoning China

ALPS TOOL(THAILAND)CO.,LTD.

Ayutthaya Factory Hi-Tech Industrial Estate, 144 Moo 1, Tambol Banlen, Amphur Bang Pa-In, Ayutthaya 13160 Thailand
Suranaree Factory 567 Moo6 Tambol Nongraviang Amphur Muang Nakhon Ratchasima 30000 Thailand

ALPS TOOL USA, INC. 5420 Newport Drive, Unit #51 Rolling Meadows, IL 60008 USA

ALPS TOOL Europe GmbH Vogelsangstr. 8, 73760 Ostfildern GERMANY

TEL +81-268-82-2511 FAX +81-268-82-7368
TEL +81-268-82-4811 FAX +81-268-82-8741
TEL +81-268-82-7911 FAX +81-268-82-7919

TEL +86-411-87935969 FAX +86-411-87935255

TEL +66-35-314-071 FAX +66-35-314-075
TEL +66-44-009-838 FAX +66-44-009-839
TEL +1-847-342-0300 FAX +1-847-342-6355
TEL +49-711-34801-139 FAX +49-711-34801-140



<https://atc.sub.jp/en/>
Email: kaigai-e@alpstool.com

2025.07.09-No.2T